


### Lever Flush Cistern Fittings




- Close Coupled / Low Level Cistern 51cm
- Close Coupled / Low Level Cistern 44cm

All WC's come with a 3/6 litre flush as standard which can be reduced to a 2.5/4.5 litre flush for the slimline cisterns  
On the Close Coupled, Low Level and Medium Level WC's you must press the lever down lightly for the 6 litre flush and lightly lift the lever for the 3 litre flush

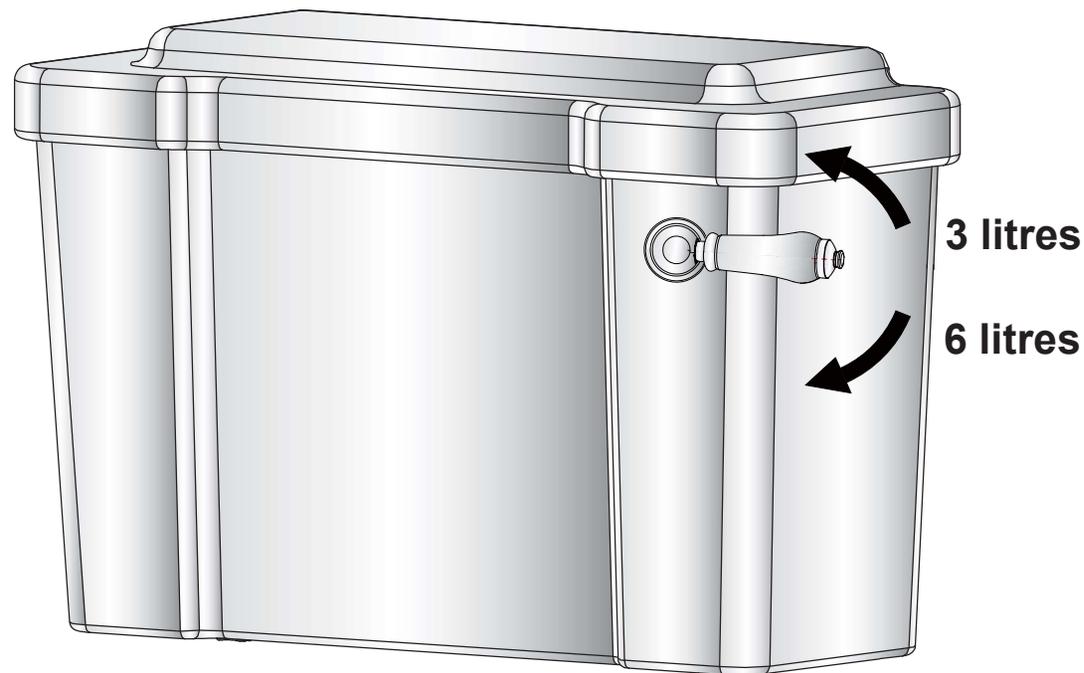

Please note that it is imperative that there are no loops or kinks in the yellow tube when installed and that the lever is not operated with excessive force as this will damage the cable inside the tube that lifts and lowers the flush valve causing the flush to fail beyond repair


**Parts supplied:**

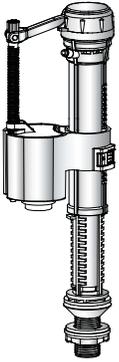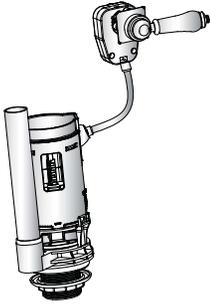					
Inlet Valve	Flush Valve	Bracket	Bolt	Rubber Doughnut	Fixing Nut
1x	1x	1x	2x	1x	1x
					
		Lever	Plastic Washer	Cone Washer	Flush Cone
1x	1x	1x	1x	1x	1x

- Please read these instructions carefully to avoid damage to the valves, and to ensure correct installation.
- Do not use bleach or bleach based cleaning products in the cistern, as these will cause damage to the seals. We cannot be held responsible or liable for any failure which results from the use of bleach based products.
- Water temperature range +2C to +45C.
- Water pressure 0.2 to 8 bar.




**1: Inlet Valve scale and adjustment settings**

**A: Major water level adjustment**





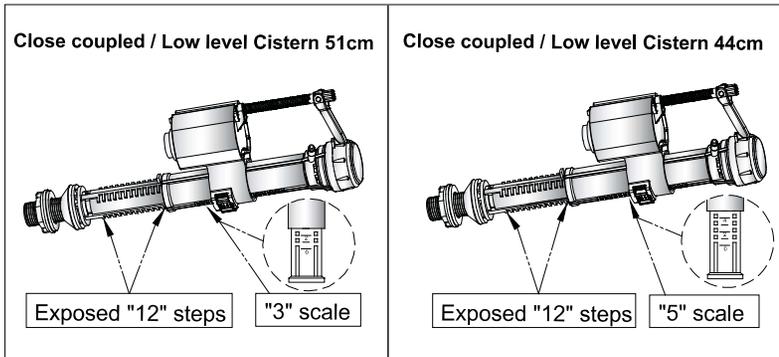


**Note:**


The Inlet Valve should be adjusted for the particular cistern into which it is being installed. The top left corner diagram indicates the correct setting for Close Coupled / Low Level Cistern 51cm ( lock the float on the 3 setting mark ).  
The top right corner diagram is for Close Coupled / Low Level Cistern 44cm ( lock the float on the 5 setting mark ).

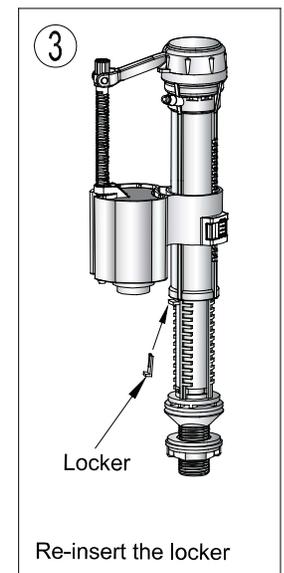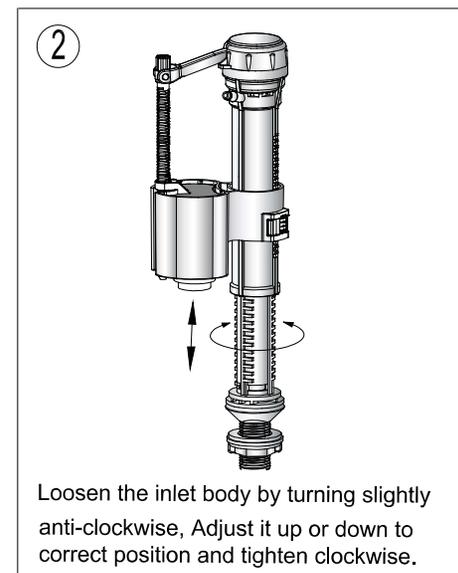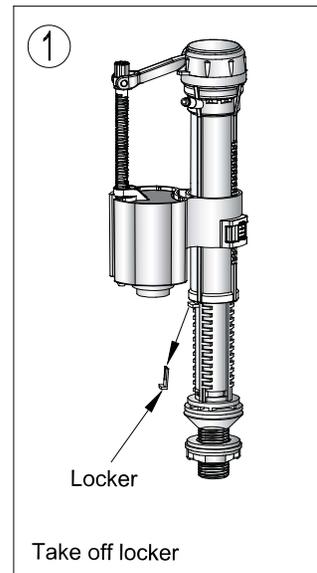


## B: Minor water level adjustment

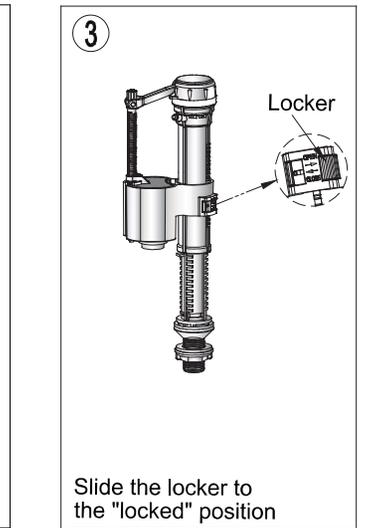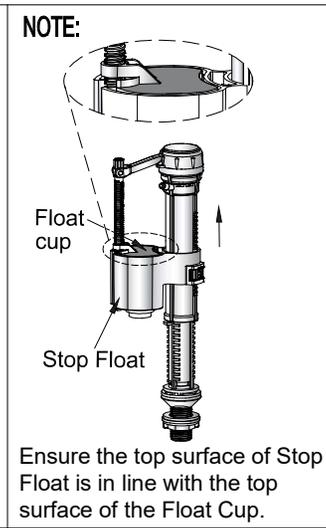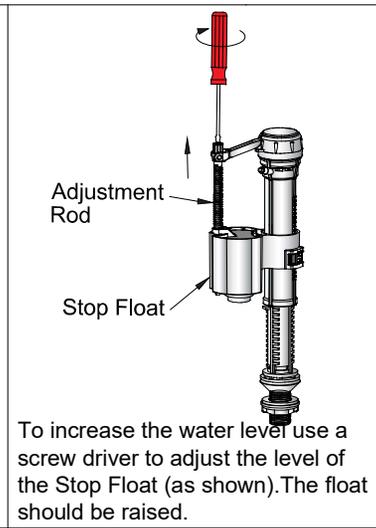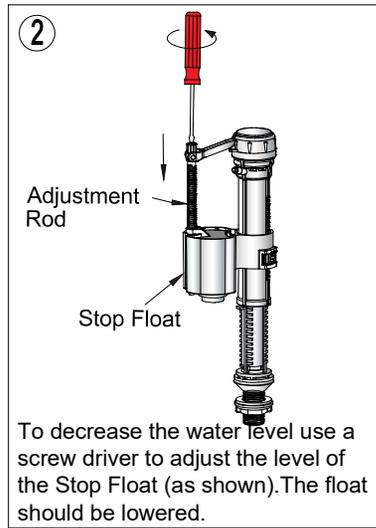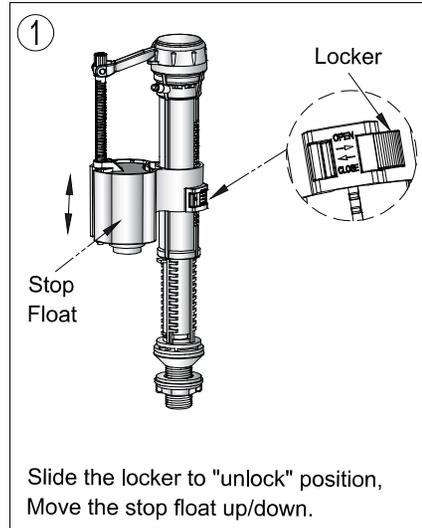

## 2: Inlet Valve installation

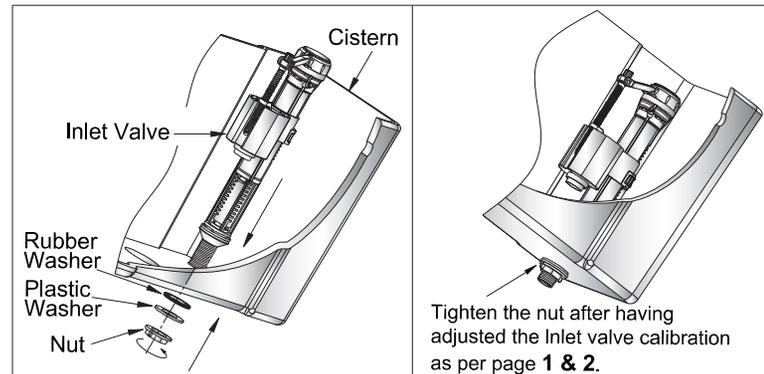

## 3: Filter cleaning (Please clean periodically)

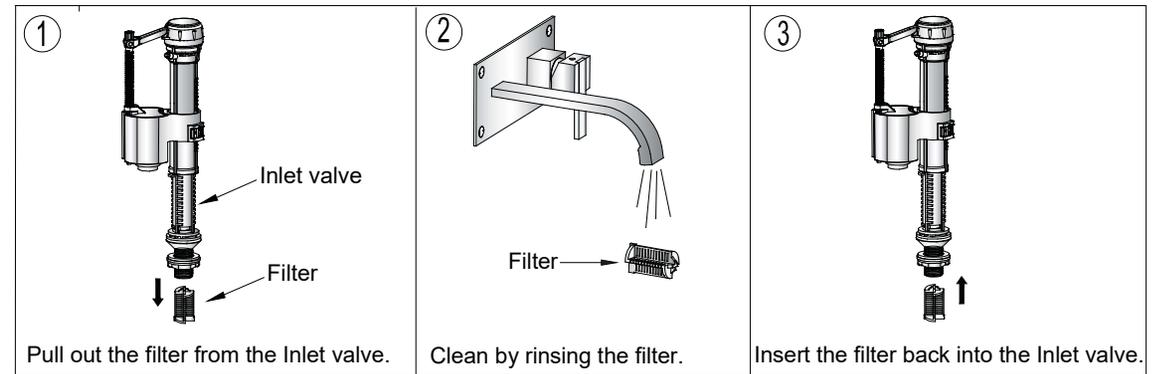

## 4: Inlet Valve trouble shooting

Problem	Reason	Solution
Incorrect water level	Incorrect adjustment.	Adjust the Water level correctly as per page 1 & 2.
Inlet Valve does not work	Water supply is closed.	Open the water supply
	The filter is blocked.	Clean the filter.
	The Stop Float has been over adjusted beyond its operational range.	Reconnect the Adjustment Rod, and adjust the water level as per A on page 1 .
Leakage	The Inlet Valve fixing nut has not been tightened.	Tighten the nut.

# Flush Valve Installation And Problem Solving

## 1: Flush Valve scale and adjustment setting

**Note:** The Flush Valve should be adjusted for the particular cistern into which it is being installed.  
 The diagram "A" below indicates the correct setting for Close Coupled / Low Level Cistern 51cm.  
 The diagram "B" is for Close Coupled / Low Level Cistern 44cm.

**A Close Coupled / Low Level Cistern 51cm**




- ① Half Flush Float : should be set on the 4.5 mark
- ② Full Flush Adjustor : should be set at 'Full Open' (top setting)
- ③ Half Flush Adjustor : should be set at 'Full Open' (top setting)

**B Close Coupled / Low Level Cistern 44cm**



- ① Half Flush Float : should be set on the 4.0 mark
- ② Full Flush Adjustor : should be set on the 4.5 mark
- ③ Half Flush Adjustor : should be set at 'Full Open' (top setting)

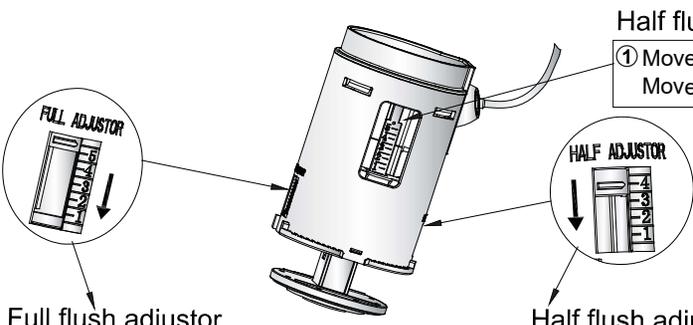

**Half flush float**

- ① Move float down, flush volume increases.  
Move float up, flush volume decreases.

**Full flush adjustor**


- ② Move adjustor down, flush volume increases.  
Move float up, flush volume decreases.

**Half flush adjustor**


- ③ Move adjustor down, flush volume increases.  
Move float up, flush volume decreases.

## 2: Flush Valve installation

**Close Coupled Flush Valve Installation**

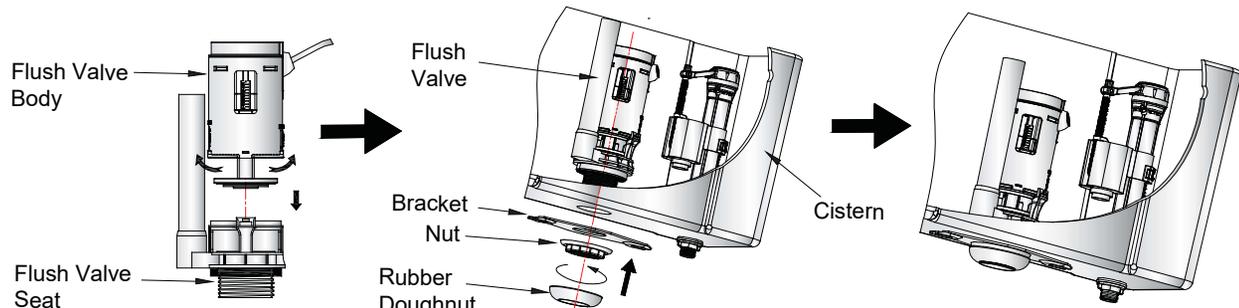

**Low Level Flush Valve Installation**

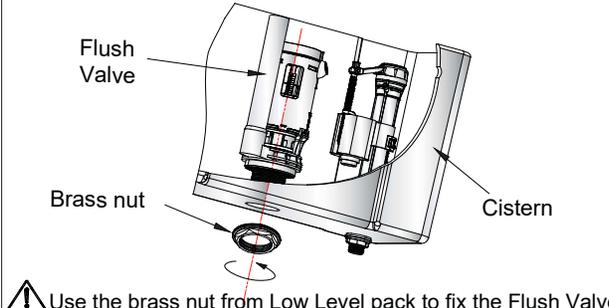


⚠ Use the brass nut from Low Level pack to fix the Flush Valve.

## 3: Flush Valve trouble shooting

Problem	Reason	Solution
Leakage	1. Incorrect installation. 2. Flush valve seat does not fit flush valve body. 3. Flush valve body is stuck.	1. Install again according to the correct installation procedure. 2. Install again. 3. Disconnect and wash flush valve body.
No flush, low flush or half flush volume	Cable is distorted.	Remove kinks or sharp bends in the cable.
Half flush water level is too high or too low.	Water level is adjusted incorrectly.	Adjust water level.

# Close Coupled Cistern & Flush Level Installation

## 1: Install Close Coupled Cistern To Pan

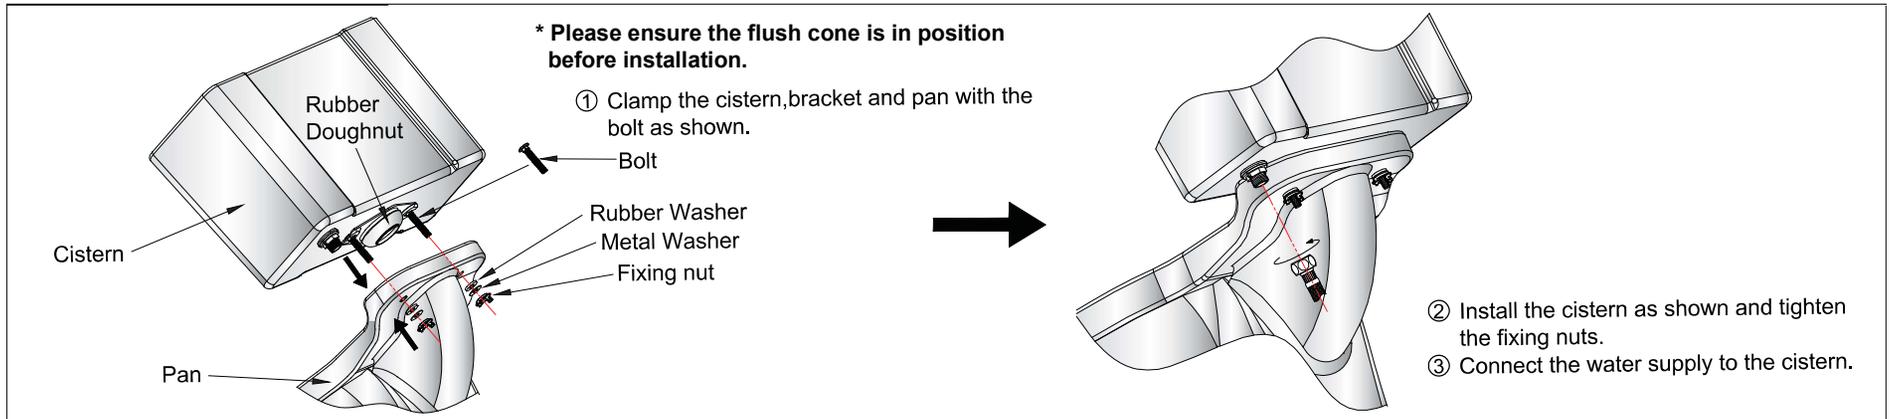

## 2: Install Lever

